

Next Step Space Weather Benchmarks

Geoffrey Reeves
Los Alamos National Laboratory

Geoff@ReevesResearch.org



SPACE WEATHER PHASE 1 BENCHMARKS

A Report by the
Space Weather Operations,
Research, and Mitigation Subcommittee
Committee on Homeland and National Security

of the
NATIONAL SCIENCE & TECHNOLOGY COUNCIL

JUNE 2018

Phase 1 Study

- Begun in 2017
- Published in 2018
- Conducted by the Space Weather Operations, Research, and Mitigation (SWORM) subcommittee
- Under the Department of Homeland Security
- Involved >25 federal departments and agencies



SPACE WEATHER PHASE 1 BENCHMARKS

A Report by the
Space Weather Operations,
Research, and Mitigation Subcommittee
Committee on Homeland and National Security

of the
NATIONAL SCIENCE & TECHNOLOGY COUNCIL

JUNE 2018

Working Toward Phase 2

- Phase 1 was fairly rapid turn-around with little input from the scientific and operator communities
- The 'Next Steps' process is currently soliciting broad community participation to provide input to Phase 2
- Phase 2 envisions more “scientifically and statistically rigorous benchmarks”

What are benchmarks?

- They are not metrics for model or prediction performance but do help set targets
- The benchmarks specify the 1-in-100 year and theoretical maximum levels of space weather conditions that can affect the nation
- They do not evaluate or classify the potential effects of a space weather event on technologies

What is the purpose of benchmarks?

- Enhance awareness of threats among critical infrastructure owners and operators
- Provide input for engineering standards
- Provide input for vulnerability & risk assessments
- Help guide development of mitigation procedures
- Establish thresholds for action

Five Topic Areas - And the Chairs

- Induced Geo-Electric Fields
Pete Riley, Predictive Science Inc.
- Ionizing Radiation
Christina Cohen, Caltech
- Ionospheric Disturbances
Susan Skone, University of Calgary
- Solar Radio Bursts
Dale Gary, New Jersey Institute of Technology
- Upper Atmospheric Expansion
David Jackson, UK Met Office

Elements of Each Topic Area

- Define the relevant space weather parameters
- Describe and document the methodology (with references)
- Determine 1-in-100-year levels and theoretical maxima

Benchmarks for Induced Geo-Electric Fields	
Environmental parameter	Intense magnetic storms may induce geo-electric fields of sufficient strength to drive quasi-direct currents in electric power grids, sometimes causing blackouts and damaging transformers.
Methodology for determining benchmarks	Benchmarking for induced geo-electric field amplitudes used two geophysical quantities: the surface impedance relationship between geomagnetic variation and the induced geo-electric field, as well as a measure of geomagnetic activity at Earth's surface. Surface impedance values are obtained by magnetotelluric surveys, which have been completed for about half of the continental United States. Surface geomagnetic activity is routinely measured at magnetic observatories and variometer stations, and geomagnetic variations during a once-per-century event are estimated by a statistical analysis.
1-in-100-year benchmarks	The median once-per-century geo-electric exceedance amplitude among surveyed sites (see Figure 1) is 0.26 volts per kilometer (V/km), with amplitudes exceeding 14 V/km in Minnesota. One standard-deviation error, the result of statistical variance in the geomagnetic data, is estimated to be about 30 percent, which is small compared to the site-to-site differences. The full benchmark of once-per-century geo-electric amplitudes across the United States, where data is available, is displayed in Figure 1.
Theoretical maximum benchmarks	Not feasible to compute benchmarks. Higher frequency amplitudes cannot be reasonably estimated from the observatory data, and while lower frequency harmonics generally yield smaller geo-electric amplitudes, additional investigation would help inform this issue.

Includes deeper textual explanations

SPACE WEATHER PHASE 1 BENCHMARKS

Benchmarks for Induced Geo-electric Fields

1. Space Weather Action Plan 1.1.1

Action 1.1.1 of the Space Weather Action Plan states: "The Department of the Interior (DOI), the Department of Commerce (DOC), and the National Aeronautics and Space Administration (NASA), in coordination with the Department of Homeland Security (DHS), the Department of Energy (DOE), and the National Science Foundation (NSF), will: (1) assess the feasibility of establishing functional benchmarks [for induced geo-electric fields] using currently available storm data sets, existing models, and published literature; and (2) use the existing body of work to produce benchmarks [for induced geo-electric fields] for specific regions of the United States."

2. Induced Geo-electric Fields

Geo-electric fields are induced in Earth's electrically conducting interior by time-dependent geomagnetic field variation. During intense magnetic storms, induced geo-electric fields can drive quasi-direct currents of electricity of sufficient strength to interfere with operation of the power grid, sometimes causing blackouts and damaging transformers. Geomagnetic disturbances have affected power grids in the past. For example, in March 1989, an intense magnetic storm caused the collapse of the entire Hydro-Quebec power grid in Canada. More recently, in October 2003, a magnetic storm caused disturbances in power grids in Scotland and Sweden. According to some scenarios, the future occurrence of an extremely intense magnetic storm could result in widespread and possibly cascading failures if the power grid is not sufficiently resilient to the effects of space weather. Even for brief periods of time, loss of power can prove disruptive for communities.

3. Methodology for Establishing Benchmarks for Induced Geo-electric Fields

This task focused on the development of a formal statistical product in terms of maps of geo-electric hazard. For practical evaluation of geo-electric hazards, estimates of two geophysical quantities are needed: (1) the surface impedance relationship between geomagnetic variation and the induced geo-electric field and (2) a measure of geomagnetic activity realized at Earth's surface.

Surface impedance is a function of the three-dimensional conductivity structure of the solid Earth and ocean. It is usually expressed in the Fourier-transformed frequency domain as a tensor. Impedance can differ greatly from one geographic location to another; it is not readily estimated from geological and tectonic models. Impedance is measured, however, during magnetotelluric surveys, such as the one sponsored by the NSF's EarthScope program,⁴ which has, so far, been completed for about half of the contiguous United States.

Surface geomagnetic activity is measured at magnetic observatories, such as those operated within the INTERMAGNET consortium,⁵ or at variometer stations, such as those of the ULTIMA consortium.⁶ For purposes of hazard assessment, analysis of magnetometer time series can be focused on either the time-autocorrelated waveform nature of the data, or it can be focused on statistical analysis of

⁴ A. Schultz et al., "USArray TA Magnetotelluric Transfer Functions: REU60, 2006–2018," doi:10.17611/DP/11455918. Retrieved from the IRIS database August 16, 2017.

⁵ J. J. Love and A. Chulliat, "An International Network of Magnetic Observatories," *EOS, Transactions, American Geophysical Union* 94, no. 42 (2013): 373–384, doi:10.1002/2013EO42

⁶ K. Yumoto et al., "ULTIMA of Ground-Based Magnetometer Arrays for Monitoring Magnetospheric and Ionospheric Perturbations on a Global Scale," presented at 2012 Fall Meeting, AGU, San Francisco, California.

SPACE WEATHER PHASE 1 BENCHMARKS


characteristic features identified in the data. These two approaches are orthogonal, but knowing the results of both is useful. This report takes a statistical approach for benchmarking induced geo-electric field amplitudes that are unlikely to occur more than once in 100 years.

To use the measured impedances and to perform a statistical analysis of observatory data, Love et al. focused on sinusoidal variation over a finite window of time.⁷ Analysis of geomagnetic variation is limited on the high-frequency end of the spectrum by the one-minute sampling rate of the historical magnetic observatory data. For specificity, the amplitudes of geomagnetic activity Fourier waveforms having period of 240 seconds and persisting over a duration of 600 seconds were estimated from approximately 30 years of observatory data. This was done for both north-south (p_x) and east-west (p_y) magnetic vector components. These amplitudes were then extrapolated using a simple statistical model to once-per-hundred-year values. The frequency domain multiplication of a Fourier magnetic field amplitude with an impedance tensor gives a geo-electric amplitude.

4. Benchmarks

For the one-in-100-year benchmark, detailed results are discussed in Love et al.⁸ A map of once-per-century geo-electric exceedance amplitudes (E_{100}) for p_x is shown in Figure 1. Depending on location, once-per-century geo-electric exceedance amplitudes can exceed 1 volt per kilometer (V/km) in many places across the northern Midwest United States and some places in the Eastern United States. Among the surveyed sites, the median geo-electric amplitude is 0.26 V/km, but because of the combination of geographic differences in geomagnetic activity and Earth-surface impedance, geo-electric amplitudes differ by over two orders of magnitude. At some sites in Minnesota, for example, once-per-century amplitudes exceed 3.00 V/km. Across other areas, such as in Florida, these amplitudes are less than 0.1 V/km. In northern Minnesota, once-per-century amplitudes exceed 14.00 V/km, while just over 100 kilometers away, amplitudes are only 0.08 V/km. One standard-deviation error, the result of statistical variance in the geomagnetic data, is estimated to be about 30 percent, which is small compared to the differences.

At some sites in the northern Midwest United States, once-per-century geo-electric amplitudes exceed 2 V/km, which is the level inferred to have been realized in Quebec during the March 1989 storm. As a point of reference only, amplitudes in some regions of northern Minnesota exceed the once-per-century baseline amplitude of 8 V/km (without latitude corrections) used by the North American Electric Reliability Corporation (NERC) in its benchmark study using synthetic Earth impedances.⁹

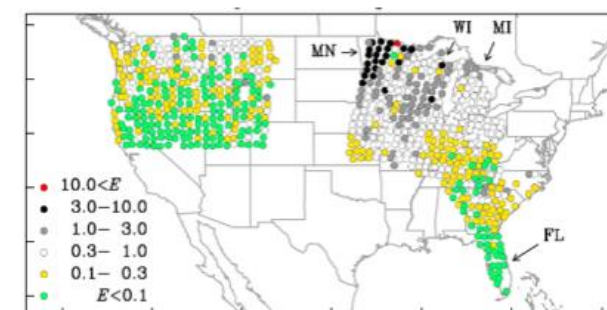

⁷ J. J. Love et al., "Geoelectric Hazard Maps for the Continental United States," *Geophysical Research Letters*, 43, no. 18 (2016): 9415–9424, doi:10.1002/2016GL070469

⁸ Ibid.

⁹ NERC, "Benchmark Geomagnetic Disturbance Event Description" (2014): 1–26.

Example: Atmospheric Expansion Benchmarks

- Some benchmarks include multiple scenarios
- Ideally benchmarks are quantitative with uncertainties
- Identifies areas where benchmarks are not currently possible

1 to 100 year benchmarks	Cause of Upper Atmosphere Expansion	Altitude (km)	Benchmark (percent neutral density increase) ^a	Associated Uncertainty
	Solar Extreme Ultraviolet and Far Ultraviolet Radiation	250	50%	± 30%
		400	100%	± 30%
		850	200%	± 30%
	Solar EUV Radiation Enhancement during Solar Flares	400	75%	factor of 2
	Coronal Mass Ejections Driving Geomagnetic Storms	400	400%	± 100%
Theoretical maximum benchmarks	Solar Extreme Ultraviolet and Far Ultraviolet Radiation	250	100%	factor of 2
		400	160%	factor of 2
		850	300%	factor of 2
	Solar EUV Radiation Enhancement during Solar Flares	400	135%	factor of 2
	Coronal Mass Ejections Driving Geomagnetic Storms	400	Not feasible to compute benchmarks	± 100%

What will 'Next Steps' do?

- Primary objective is to provide Peer Review of Phase 1
- And provide Recommendations for Phase 2
- Are the benchmark parameters the right ones for users/operators?
- Are the benchmark values the best that are currently possible?
- Is the methodology clear and is it up-to-date?
- Identify areas of strength and consensus.
- Identify areas of weakness, errors, or room for improvement.

How do you get involved?

- Read and review the Phase 1 report!
google “space weather benchmarks”
- An RFI was published and advertised but with little response
<https://idalink.org/SWxBenchmarks>
- Input welcome in any form at any time
- Contact Me or the focus area chairs (who will be up next)
- International involvement is strongly encouraged
- Community Input Workshop April 23, @ Sheraton West, Denver
- Additional workshop next summer (draft

Community Input Workshop

- Will be held in ~two weeks: April 23, @ Sheraton West, Denver
- There is limited space. We need to know that you are coming
- To RSVP: Email Robin Dorsey (rdorsey@nasaprs.com)
CC Tom Colvin (swx@ida.org)
- Please include your name and the benchmark(s) you're interested in participating in
- If you forget these e-mails, contact one of the focus area